



# ultra-flow



+27 21 5517496



sales@ultra-flow.com



www.ultra-flow.com



## Pneumatic Piston Pumps


Distribution & Transfer - Grease

Ratio: 50:1 Flow Rate: 1500 g/min



PUMP AIR FEEDING PRESSURE

- A A** 8 bar 116 psi
- B B** 6 bar 87 psi
- C C** 4 bar 58 psi

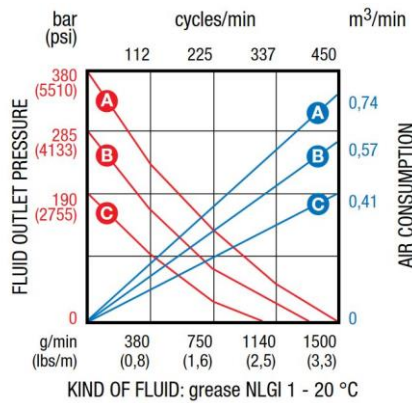

62041

62048

62074

62095

COMPATIBLE FLUIDS		GREASES MEDIUM-HIGH VISCOSITY			
SUCTION TUBE UPPER BODY		ALUMINIUM			
SUCTION TUBE		CARBON STEEL			
AIR INLET CONNECTION	BSP	F 1/4' G	F 1/4' G	F 1/4' G	F 1/4' G
FLUID INLET CONNECTION	BSP	F 3/8' G	F 3/8' G	F 3/8' G	F 3/8' G
AIR WORKING PRESSURE	BAR	6-8	6-8	6-8	6-8
AVERAGE AIR CONSUMPTION	L/MIN	330	330	330	330
NOISE LEVEL	dB	81	81	81	81
AIR MAX PRESSURE	BAR	8	8	8	8
SUITABLE FOR DRUMS	KG	16-20	20-30	50-60	180-220

air-operated piston pump

high pressure over medium-long distance

ideal for distributing medium-high viscosity grease

ideal for mobile and centralised-fixed installations